



PACIFIC CREST TRANSFORMERS

GROUNDING TRANSFORMER

COOLING **KNAN**
 HV **13800 ZIG ZAG**
 LV **[REDACTED]**



65 ° C RISE
 BIL **95** KV
 BIL **[REDACTED]** KV

3 PHASE **60** Hz TRANSFORMER, **22.19** OHMS PER PHASE
CU HV **[REDACTED]** LV COND. ELEMENT **2355** LBS. TOTAL WEIGHT **8650** LBS.
373 GAL **ENVIROTEMP** AT **2799** LBS. LEVEL CHANGES **.49** INCH PER. 10°C.
 FLUID LEVEL **7.5** INCHES FROM TOP OF HAND HOLE AT 25°C.
 MAX TANK PRESS. POS **10.00** NEG **8.0** PSI
 SERIAL # **PVA-0009** DATE OF MFG: **01/2016**

INSTRUCTION REFERENCE MANUAL IB9.210
 CONTAINS NO DETECTABLE LEVEL OF PCB (LESS THAN 2PPM) AT THE TIME OF MANUFACTURE

UNIT DESIGNED FOR:

- 1000** AMPS FAULT CURRENT FOR **10.0** SECONDS
- 150.0** AMPS CONTINUOUS NEUTRAL CURRENT
- 50.0** AMPS CONTINUOUS PHASE CURRENT

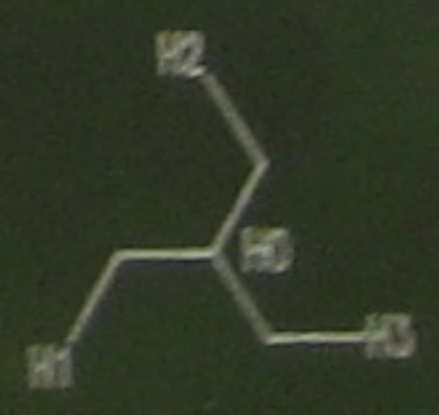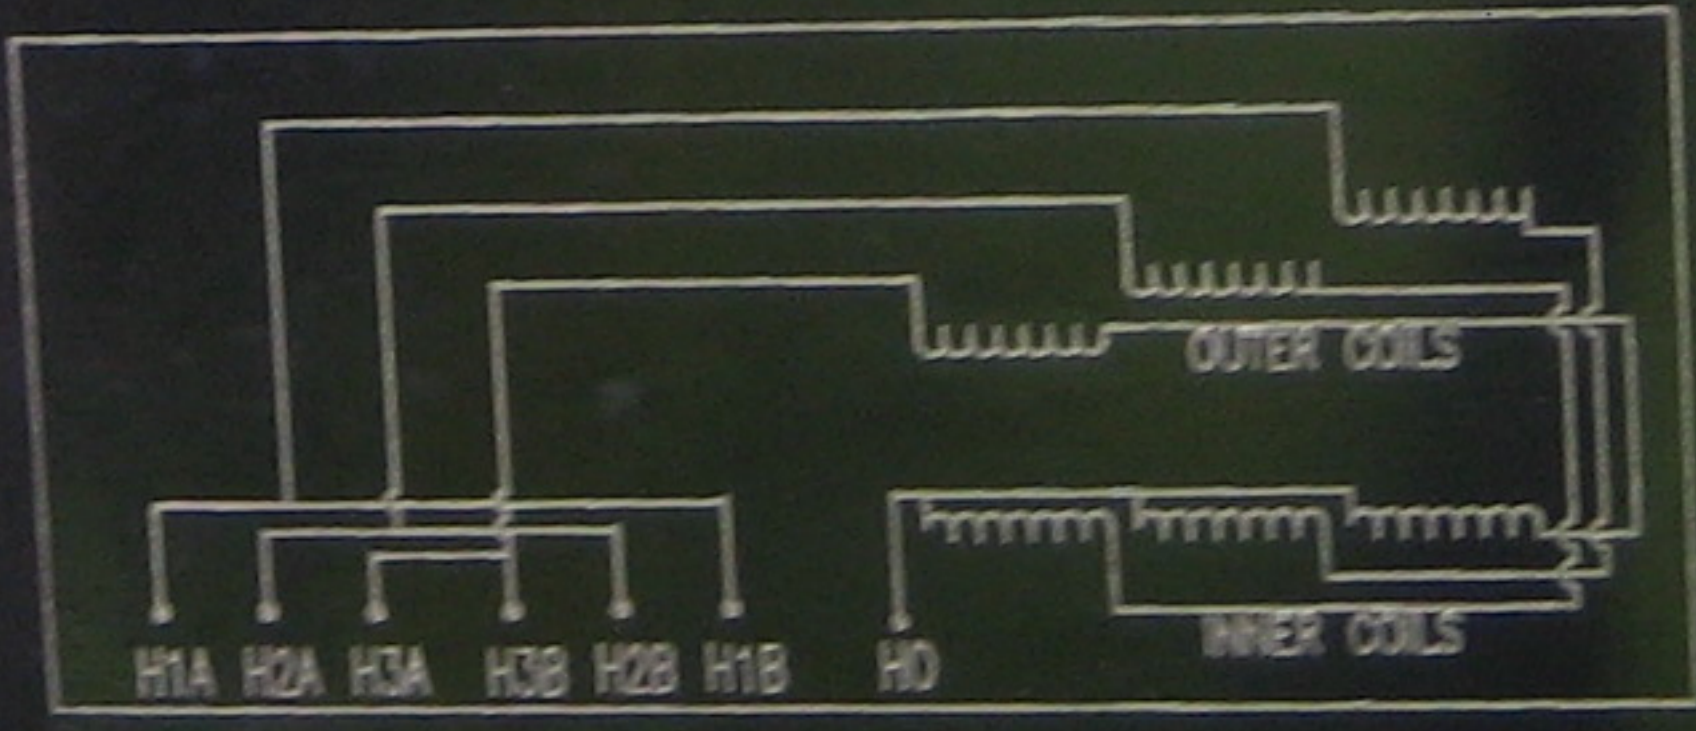

U0435011